

## **Indoor Fine Pixel LED**

### MW7216-E-BL-U



### **Key Features**

- Broadcast grey processing gives more image details
- Superior brightness and color uniformity maintains smooth and complete image quality
- Bezel-free native 1080P, 4K and customized resolution LED video wall system
- High brightness provides vivid images in a range of lighting conditions
- Superior contrast ratio
- Ultra high refresh rate
- Wide view of field:160°(H)/ 140°(V)
- Low heating and natural heat dissipation mechanism enables fan-less design, no noise
- Support 7\*24 working and lower power consumption
- Long service life
- Maintain from the front of the LED making it ideal for space-constrained installations and eliminating the need for rear access space.




# Specifications

Model	MW7216-E-BL-U	
LED Module		
Module type	Surface mounted trinity LED	
Pixel pitch	1.667	
Resolution (W×H)	96×108	
Dimensions (W×H)	160 mm×180mm	
LED Unit		
Dimensions (W×H×D)	640mm×360mm×54.5mm	
Modules Component(W×H)	4×2	
Resolution(W×H)	384×216	
Weight(Kg)	6.95	
Screen Area	0.2304 m <sup>2</sup>	
Pixel Density	360000 pitch/ m <sup>2</sup>	
Surface evenness	≤0.1	
Material	Die-cast Aluminum	
Optical		
Single Pixel Brightness Correction	Support	
Single Pixel Color Correction	Support	
Brightness(nits)	50 to 800 adjustable	
Color Temperature(K)	3000 to 10000 adjustable	
Viewing Angle	Horizontal 160°, Vertical 140°	
Center distance deviation of LED	≤2.5%	
Brightness uniformity	≥97%	
Color uniformity	≤±0.003 Cx, Cy	
Contrast	≥4000:1	
Processing Performance		
Grey Level	14 bit	
Driving Mode	Constant current driving, 1/27 scan	
Frame Frequency	50/60 Hz	
Refresh Rate	1920Hz	
Electrical		
Power Supply	100 to 240 V AC	
Max Consumption	530 W/ m <sup>2</sup>	
Average consumption	180 W/ m <sup>2</sup>	
General		
Maintenance Mode	Front Maintenance	
Ingress protection	IP5X	



Operation Temperature	-10°C ~ 40 °C
Operating Humidity	8%~85% (No Condensation)
Storage Temperature	-10°C ~ 55°C
Storage Humidity	10%~90% (No Condensation)
Working Hours	≥100,000

### **Dimensions**

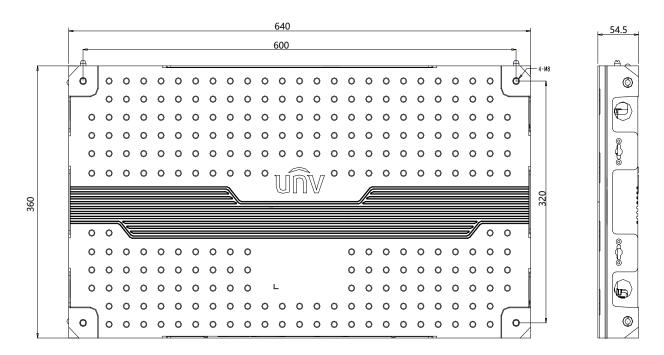

#### Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseas business@uniview.com; global support@uniview.com

http://www.uniview.com

©2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.