

XVR301-G Series



Key Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4/8-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable


Specifications

Model	XVR301-04G	XVR301-08G
Video/Audio Input		
Analog Video Input	4-ch, BNC	8-ch, BNC
IP Video Input	2-ch(only IP up to 6ch), each channel up to 4MP	4-ch(only IP up to 8ch), each channel up to 4MP
Supported Analog Camera Types	Support AHD input: 5MP@20fps(The first channel) 5MP@12fps 4MP@30fps(The first channel) 4MP@15fps 1080P@30fps 720P@60fps Support TVI input: 5MP@20fps(The first channel) 5MP@12fps 4MP@30fps(The first channel) 4MP@15fps 1080P@30fps 720P@60fps	Support AHD input: 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps Support TVI input: 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps Support CVI input: 4MP@15fps 1080P@30fps 720P@30fps

	Support CVI input: 5MP@20fps(The first channel) 4MP@30fps(The first channel) 4MP@15fps 1080P@30fps 720P@30fps Support CVBS input	Support CVBS input
Audio Input	1-ch, RCA	
Video/Audio Output		
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Audio Output	1-ch, RCA	
Synchronous Playback	4-ch	8-ch
Two-way Audio	1-ch, RCA	
Network		
Incoming Bandwidth	24Mbps	40Mbps
Outgoing Bandwidth	48Mbps	60Mbps
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE	
Encoding		
Recording Resolution	5MP Lite/4MP Lite /1080P/720P/960H/D1/CIF	
Recording Frame Rate	Main stream: 5MP Lite@12fps 4MP Lite@15fps 1080P Lite@15fps 1080P@15fps 720P@30fps Sub stream: D1@30fps(Max)	Main stream: 5MP Lite@6fps 4MP Lite@8fps 1080P Lite@15fps 1080P@8fps 720P@15fps Sub stream: D1@15fps(Max)
Hard Disk		
SATA	1 SATA interface	
Capacity	Up to 8TB for each disk (The maximum HDD capacity varies with environment temperature)	
External Interface		


Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
General	
Power Supply	12V DC Power Consumption: ≤ 8 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	260mm ×240mm× 46mm (10.2" × 9.4"×1.8")
Weight (without HDD)	≤1.1 Kg (2.42lb)

Dimensions

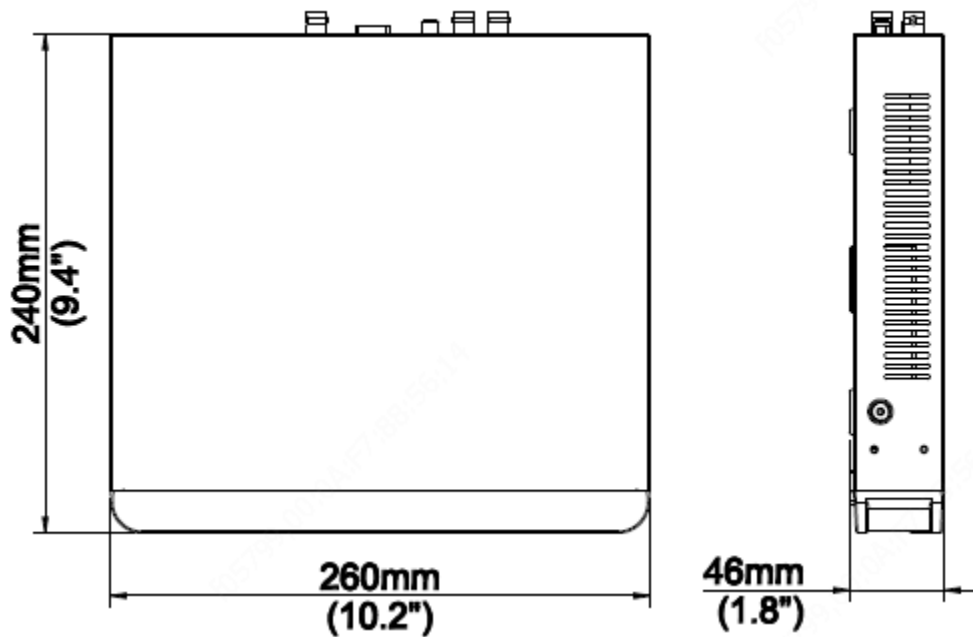

Rear Panel

Take XVR301-04G for example

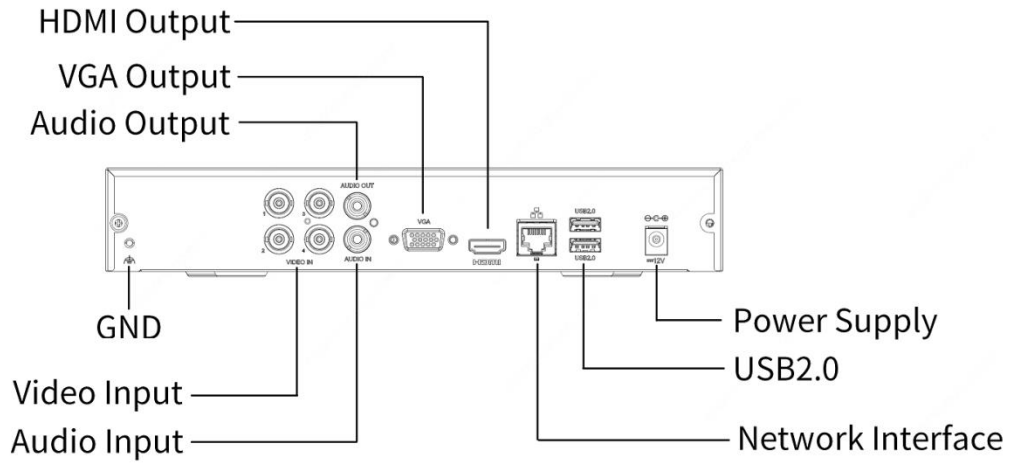

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.